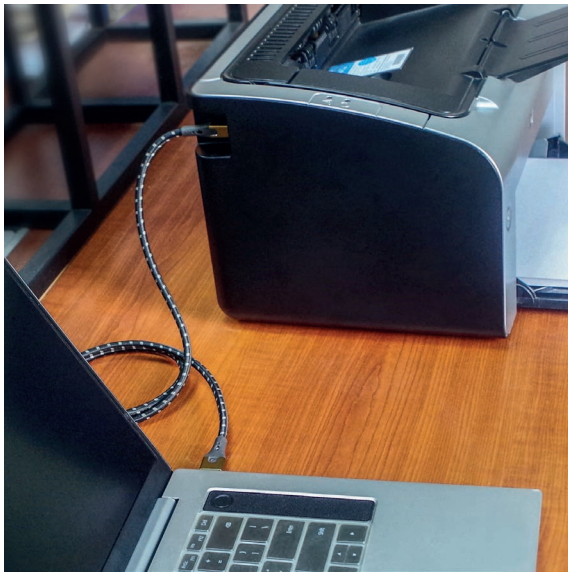

**AUDIO
EQUIP**
STATE OF THE ART


USB 2.0 CABLE TYPE A TO TYPE B

USB PRIMUS B

USB type B connectors are often found on audio amplifiers, printers or scanners, storage media or presentation beamers. With this type of connection, absolutely reliable and loss-free data transmission is particularly important. This is exactly what the Oehlbach USB 2.0 data cable USB Primus B achieves. The USB A connection can be used reversibly, i.e. on both sides. Oehlbach's USB Primus B creates a state of the art connection with the USB type A to type B cable. This special quality is primarily due to a monocrystalline oxygen-free inner conductor made of HPOCC copper. Under a triple shielding it provides unrestricted data transfer. The USB Primus B cable is equipped with 24ct gold plated full metal plugs at the two connections for 100% contact reliability. Further protection is provided by the cable's high-quality fabric jacket. This prevents accidental kinking and strengthens the durability of this premium cable.



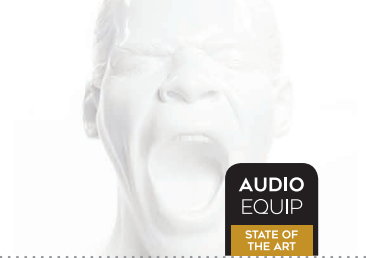
The Hi-Speed USB logo is a registered trademark of USB Implementers Forum, Inc.

cable material	TPE, fabric sheath
Connector material	solid metal plug
Bending radius	45 mm
Colour	Black/Gold
Inner conductor material	HPOCC® – mono-crystalline oxygen-free copper inner conductor
cable geometry	Round
Shielding	triple shielding
Shielding construction	2 x aluminium foil + 1 x copper braiding
AWG	26/18 AWG
Transmission rate	480 Mbps
Features	Reliable contact, loss-free signal transmission, 24kt gold plated contacts , 30 years warranty, PVC Free
Cable diameter	6 mm

item no.	Length	Color	EAN	MSRP (19%)
9540	0.50 m	Black/Gold	4003635095409	34.99 €
9541	1 m	Black/Gold	4003635095416	39.99 €
9542	2 m	Black/Gold	4003635095423	54.99 €



More information:

**AUDIO
EQUIP**
STATE OF
THE ART

item no.	Length	Color	EAN	MSRP (19%)
9543	3 m	Black/Gold	4003635095430	69.99 €
9544	5 m	Black/Gold	4003635095447	99.00 €
9545	7.50 m	Black/Gold	4003635095454	129.00 €
9546	10 m	Black/Gold	4003635095461	179.00 €

